


WELLMATE CLASSIC - SERIES SPECIFICATIONS

P/N	MODEL	CAPACITY LITER/GAL	CAT	HEIGHT "A"	DIAMETER "B"	DRAIN HEIGHT "C"	SYSTEM CONNECTION "D"	BASE DIAMETER "E"	DRAWN DOWN 30/50 SETTING LITER/GAL	DRAWING
CH32824	WM0450	453.1 / 119.7	IV	1888.0mm (74.25")	810.0mm (24.0")	57.0mm (2.25")	1.25" NPT	527.1mm (20.75")	135.9 / 35.9	CH21231
CH32823	WM0330	328.2 / 86.7	III	1422.4mm (56.00")	810.0mm (24.0")	57.0mm (2.25")	1.25" NPT	527.1mm (20.75")	98.5 / 26.0	
CH32822	WM0235	227.1 / 60.0	III	1074.4mm (42.30")	810.0mm (24.0")	57.0mm (2.25")	1.25" NPT	527.1mm (20.75")	68.1 / 18.0	
CH32821	WM0180	178.3 / 47.1	III	1066.8mm (42.00")	530.0mm (21.0")	57.0mm (2.25")	1.25" NPT	527.1mm (20.75")	53.5 / 14.1	
CH33210	WM0300	301.3 / 79.6	III	1595.1mm (62.8")	530.0mm (21.0")	57.0mm (2.25")	1.25" NPT	527.1mm (20.75")	90.4 / 23.8	CH21230
CH32820	WM0150	152.6 / 40.3	III	1463.0mm (57.6")	410.0mm (16.0")	44.0mm (1.75")	1" NPT	390.7mm (15.38")	45.8 / 12.1	
CH32819	WM0120	111.7 / 29.5	II	1130.3mm (44.5")	410.0mm (16.0")	44.0mm (1.75")	1" NPT	390.7mm (15.38")	33.5 / 8.9	CH21229
CH32818	WM0075	75.0 / 19.8	II	825.5mm (32.5")	410.0mm (16.0")	44.0mm (1.75")	1" NPT	390.7mm (15.38")	22.5 / 5.9	
CH32817	WM0060	54.5 / 14.5	II	698.5mm (27.5")	410.0mm (16.0")	44.0mm (1.75")	1" NPT	390.7mm (15.38")	16.5 / 4.4	

Maximum operating pressure rating 8.6 Bar / 125 PSIG;
 Operating Temperature range of 4°C (40°F) to 49°C (120°F)

The above information may vary without notice.

In keeping with current industry standards, drawdown factors are based on Boyle's Law. Actual drawdown will vary depending upon system variables, including the accuracy and operation of the pressure switch, gauge and the operating temperature of the system.

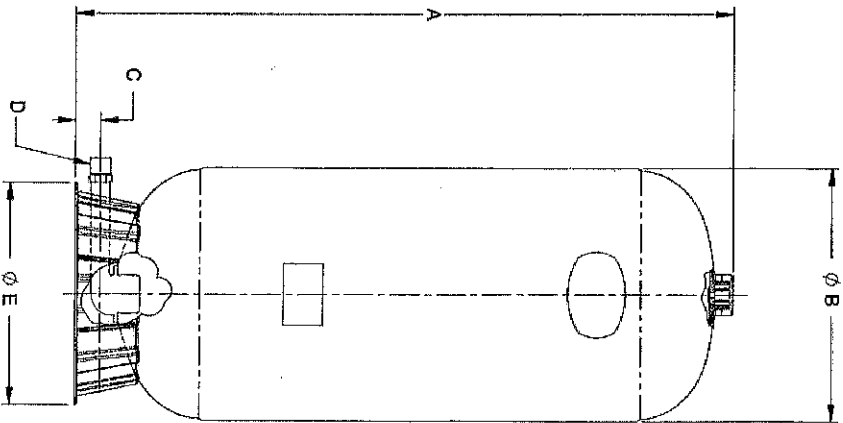

CH19422-1 REV L

3/20/2019