

**DOMO 20VXT**


**Technical data**

Company name  
Contact  
Phone number  
e-mail address

Performance according to ISO 9906:2012 – Grade 3B

Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s

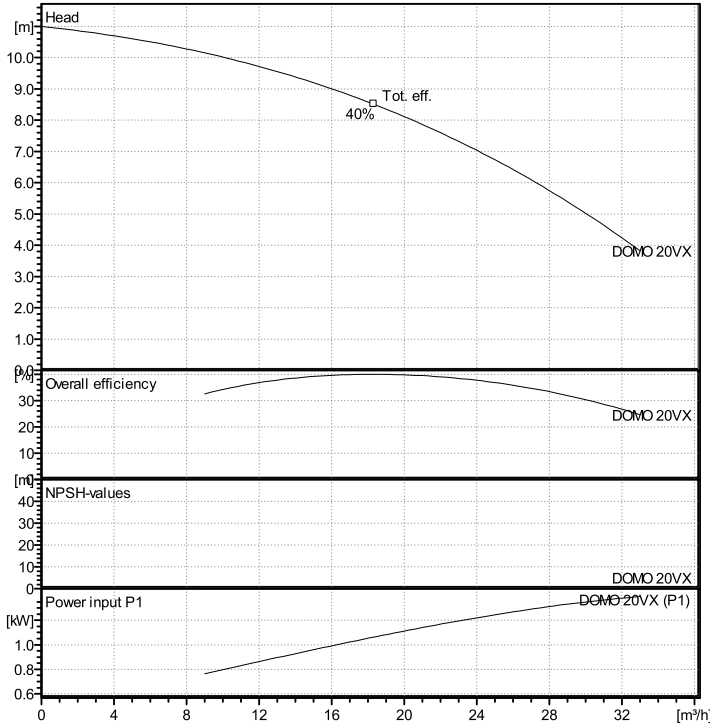

**Operating Data Specification**

Flow	0 m³/h
Head	0 m

**Hydraulic data (duty point)**

Flow	
Head	
Max. shaft power	1.12 kW

**Pump data**

Make	Lowara
Type	DOMO 20VXT Submersible waste water pump
Speed	2900
Head H(Q=0)	11 m
Suction side	
Discharge side	
Types of installation	Submersible pump
Weight	14.6 kg

**Materials / seals**

Pump body	Stainless steel
Impeller	Stainless steel
SUCTION FLANGE	Stainless steel
Fixing ring	Stainless steel

**Shaft Seal**

Rotating Assembly	Q1-Silicon carbide
Fixed Assembly	Q1-Silicon carbide
Elastomers	P-NBR
Springs	G-AISI 316
Other Components	G-AISI 316

**Motor data**

Rated power P2	1.5 kW	Nom. Speed	2855 rpm
Frequency	50	Phase	3~
Rated voltage	400 V	Rated current	3.59 A
Protection class	IP X8	Insulation class	F
Permitted voltage tolerance +/- 10%			

**Dimensions** mm

C	198		
DNM	Rp2		
H	468		
H1	111.5		
L2	-		

Note:

